

70

ESSENTIAL SERIES

ACETARBO10

RUBINETTO
KITCHEN / BAR TAP

OFFICINE GULLO
DESIGN

DESCRIZIONE DESCRIPTION




Rubinetto KITCHEN / BAR TAP

DATI TECNICI TECHNICAL INFO

TOP SPESSORE MASSIMO - TOP THICKNESS MAXIMUM	1 15/16"
TOP SPESSORE MINIMO - TOP THICKNESS MINIMUM	3/8"
NUMERO FORI - NUMBER OF HOLES	1
DIAMETRO FORO - FITTING HOLE DIAMETER	Ø 1 3/2" - 1 9/16"
DISTANZA TRA COLLEGAMENTI MIN - INLET SUPPLY SPREAD MINIMUM	/
DISTANZA TRA COLLEGAMENTI MAX - INLET SUPPLY SPREAD MAXIMUM	/
COLLEGAMENTO IDRICO - HOSE OR INLET CONNECTION SIZE	3/8" Female NPT
LUNGHEZZA ATTACCO FLESSIBILE - HOSE CONNECTION LENGTH	13 3/8"
ALTEZZA TOTALE - TOTAL HEIGHT	9 7/16"
ALTEZZA GETTO - SPOUT HEIGHT	6 1/2"
LUNGHEZZA GETTO - SPOUT REACH	Min: 9 13/16" - Max: 11 13/16"
GETTO GIREVOLE - SPOUT SWIVEL	Yes
NUMERO MANOPOLE - NUMBER OF HANDLES	2
MATERIALE BASE - PRIMARY MATERIAL	Brass
TIPO INSTALLAZIONE - INSTALLATION TYPE	TOP Mounted
MATERIALE VALVOLA - VALVE MATERIAL	Ceramic
PRESSIONE DELL'ACQUA - WATER PRESSURE	70,0 / 20,0 / 45,0 psi
SUGGERED APPLICATION	Bar, Kitchen, Laundry
HANDLE SPREAD MINIMUM	7 1/16"
HANDLE SPREAD MAXIMUM	7 1/16"

DISEGNO TECNICO TECHNICAL DRAWINGS

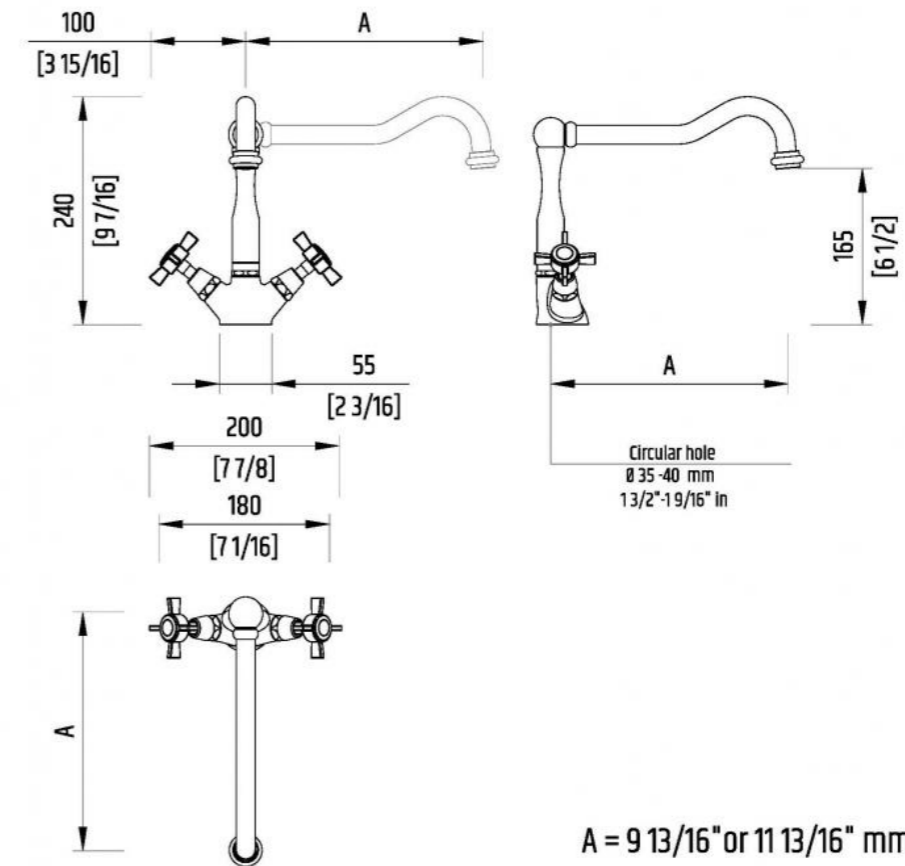

A = 9 13/16" or 11 13/16" mm
A = 250 o 300 mm