ACUTAOG01C

KITCHEN FAUCET

OFFICINE GULLO
FIRENZE

DESCRIZIONE
DESCRIPTION

KITCHEN FAUCET

DISEGNO TECNICO
TECHNICAL DRAWINGS

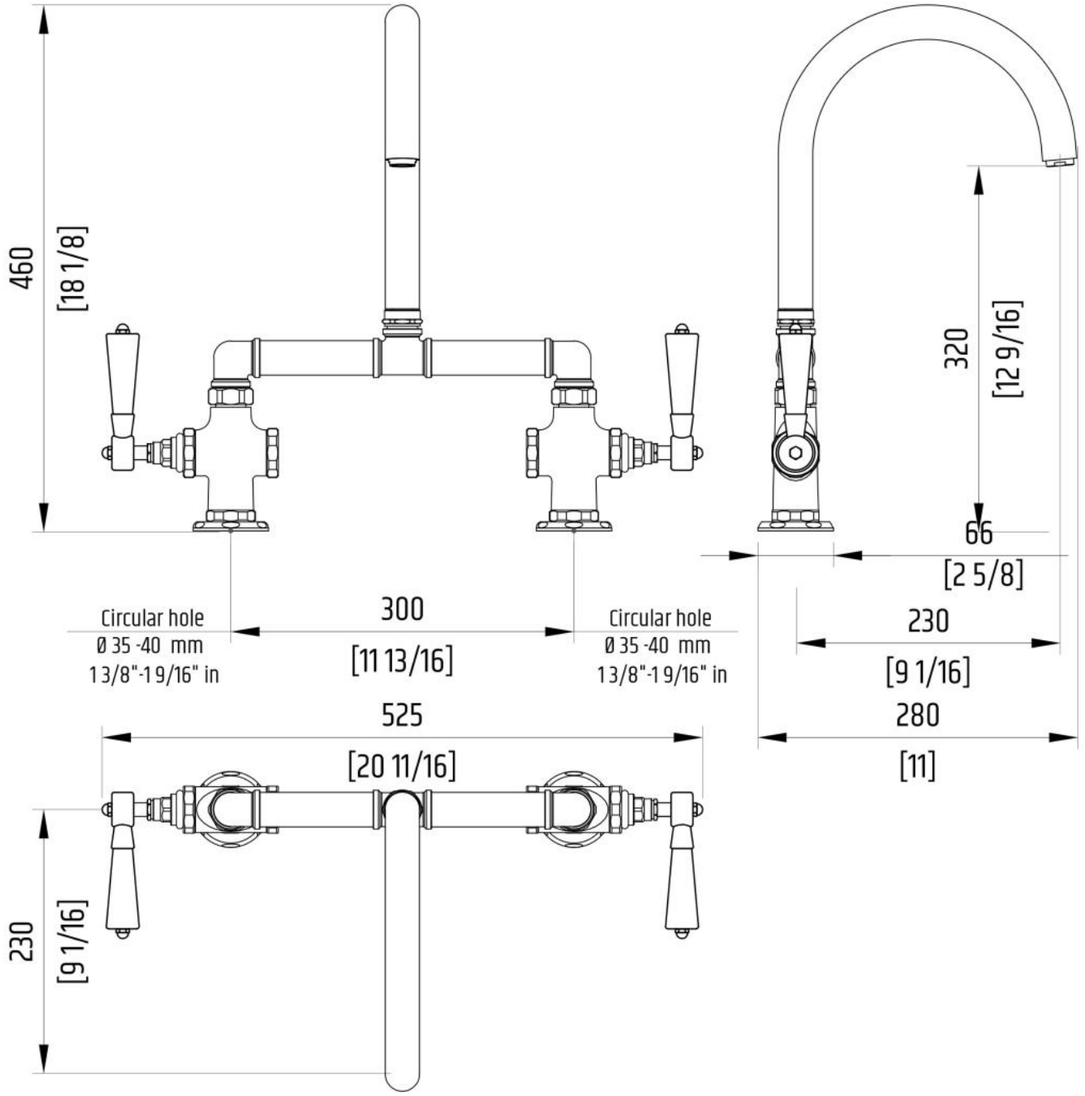

DATI TECNICI
TECHNICAL INFO

TOP SPESSORE MASSIMO - TOP THICKNESS MAXIMUM	1 15/16"
TOP SPESSORE MINIMO - TOP THICKNESS MINIMUM	3/8"
NUMERO FORI - NUMBER OF HOLES	2
DIAMETRO FORO - FITTING HOLE DIAMETER	¨ 1 3/8" - 1 9/16"
DISTANZA TRA COLLEGAMENTI MIN - INLET SUPPLY SPREAD MINIMUM	11 13/16"
DISTANZA TRA COLLEGAMENTI MAX - INLET SUPPLY SPREAD MAXIMUM	11 13/16" in
COLLEGAMENTO IDRICO - HOSE OR INLET CONNECTION SIZE	9/16" female NPT (USA)
LUNGHEZZA ATTACCO FLESSIBILE - HOSE CONNECTION LENGTH	21" 11/16
ALTEZZA TOTALE - TOTAL HEIGHT	18 1/8"
ALTEZZA GETTO - SPOUT HEIGHT	12 9/16"
LUNGHEZZA GETTO - SPOUT REACH	9 1/16"
PORTATA - FLOW RATE	1.2 gpm
GETTO GIREVOLE - SPOUT SWIVEL	Yes
NUMERO MANOPOLE - NUMBER OF HANDLES	2
MATERIALE BASE - PRIMARY MATERIAL	Brass
TIPO INSTALLAZIONE - INSTALLATION TYPE	TOP Mounted
MATERIALE VALVOLA - VALVE MATERIAL	Ceramic
PRESSIONE DELL' ACQUA - WATER PRESSURE	70.0 / 20,0 / 45,0 psi
SUGGESTED APPLICATION	Bar, Kitchen, Laundry
HANDLE SPREAD MINIMUM	19 15/16"
HANDLE SPREAD MAXIMUM	20 11/16"

Le immagini non sono vincolanti. La ditta si riserva di apportare modifiche senza preavviso.
The pictures are purely representative. The manufacturer reserves the right to modify the technical data and models without previous notice.