

# 70

ESSENTIAL SERIES

## ACUTARBO30

KITCHEN / BAR FAUCET

OFFICINE GULLO  
DESIGN

### DESCRIZIONE DESCRIPTION




### KITCHEN / BAR FAUCET

### DATI TECNICI TECHNICAL INFO

TOP SPESSORE MASSIMO - TOP THICKNESS MAXIMUM	/
TOP SPESSORE MINIMO - TOP THICKNESS MINIMUM	/
NUMERO FORI - NUMBER OF HOLES	/
DIAMETRO FORO - FITTING HOLE DIAMETER	/
DISTANZA TRA COLLEGAMENTI MIN - INLET SUPPLY SPREAD MINIMUM	5 1/4"
DISTANZA TRA COLLEGAMENTI MAX - INLET SUPPLY SPREAD MAXIMUM	7 1/4"
COLLEGAMENTO IDRICO - HOSE OR INLET CONNECTION SIZE	1/2" Male NPT
LUNGHEZZA ATTACCO FLESSIBILE - HOSE CONNECTION LENGTH	/
ALTEZZA TOTALE - TOTAL HEIGHT	7 7/8"
ALTEZZA GETTO - SPOUT HEIGHT	3 15/16"
LUNGHEZZA GETTO - SPOUT REACH	Min: 9 13/16" - Max: 11 13/16"
GETTO GIREVOLE - SPOUT SWIVEL	Yes
NUMERO MANOPOLE - NUMBER OF HANDLES	2
MATERIALE BASE - PRIMARY MATERIAL	Brass
TIPO INSTALLAZIONE - INSTALLATION TYPE	Wall Mounted
MATERIALE VALVOLA - VALVE MATERIAL	Ceramic
PRESSIONE DELL'ACQUA - WATER PRESSURE	70,0 / 20,0 / 45,0 psi
SUGGERED APPLICATION	Bar, Kitchen, Laundry
HANDLE SPREAD MINIMUM	5 1/4"
HANDLE SPREAD MAXIMUM	7 1/4"

### DISEGNO TECNICO TECHNICAL DRAWINGS

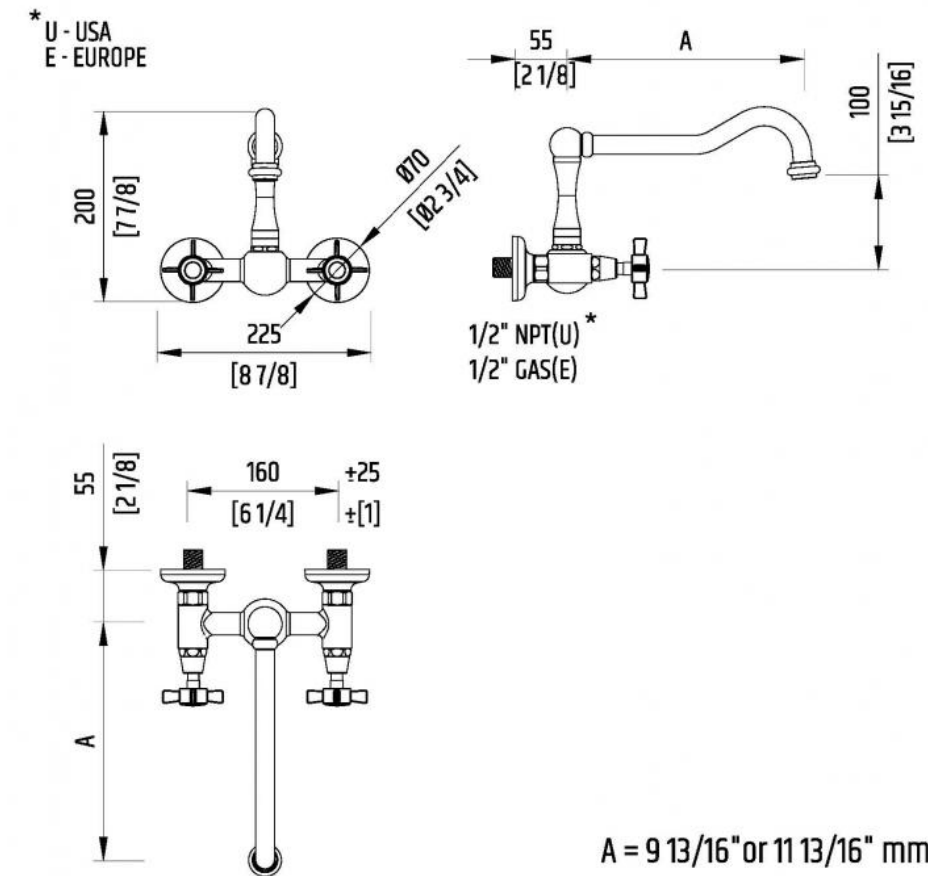

A = 9 13/16" or 11 13/16" mm  
A = 250 o 300 mm