

FRIDGE-FREEZER




DESCRIPTION

The built-in fridge-freezer combination offers stainless steel interior, Generous LED lighting concept, Solid aluminum door bins, Net volume 19.8 cu.ft. Integrated automatic ice maker with fixed water connection, One motorized glass shelf, adjustable when fully loaded. One asymmetrically split glass shelf. Fully extendable freezer drawer with practical divider. Electronic precision temperature control with digital temperature display. Dynamic cool air distribution with Multi-Flow Air System. Automatic defrosting with defrost water evaporation. Activated charcoal air filter. Energy-saving vacation mode. Open-door and malfunction warning system. ENERGY STAR® qualified. Gaggenau mechanism.

FEATURES

Cooling compartment: Net volume 14.3 cu. ft. No-frost technology with fast cooling. Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C). 2 safety glass shelves, 1 of which is motorized. 1 asymmetrically split safety glass shelf, manually adjustable. 2 fully extendable drawers with transparent front. Bright interior lighting with LED sidewall pillars. 2 height adjustable door bins, one large gallon door bin. 1 door bin with transparent front flap. Temperature controlled drawer: Net volume 0.9 cu. ft. No-frost technology. 1 continuous, fully extendable temperature controlled drawer close to 32F with transparent front, manually controllable. Freezer compartment: Net volume 5.8 cu. ft. (166 liters). No-frost technology with fast freezing. Temperature adjustable from 7 °F to -9 °F (-14 °C to -25 °C). 2 fully extendable drawers. Interior lighting with two spot lights. Ice dispenser: Integrated automatic ice maker in the freezer compartment, with fixed water connection. Ice maker can be switched off independently. Ice cube production approx. 3.1 lb (1.4 kg)/24 h. Removable ice storage bin with approx. 6.6 lb (3 kg) capacity.

INSTALLATION

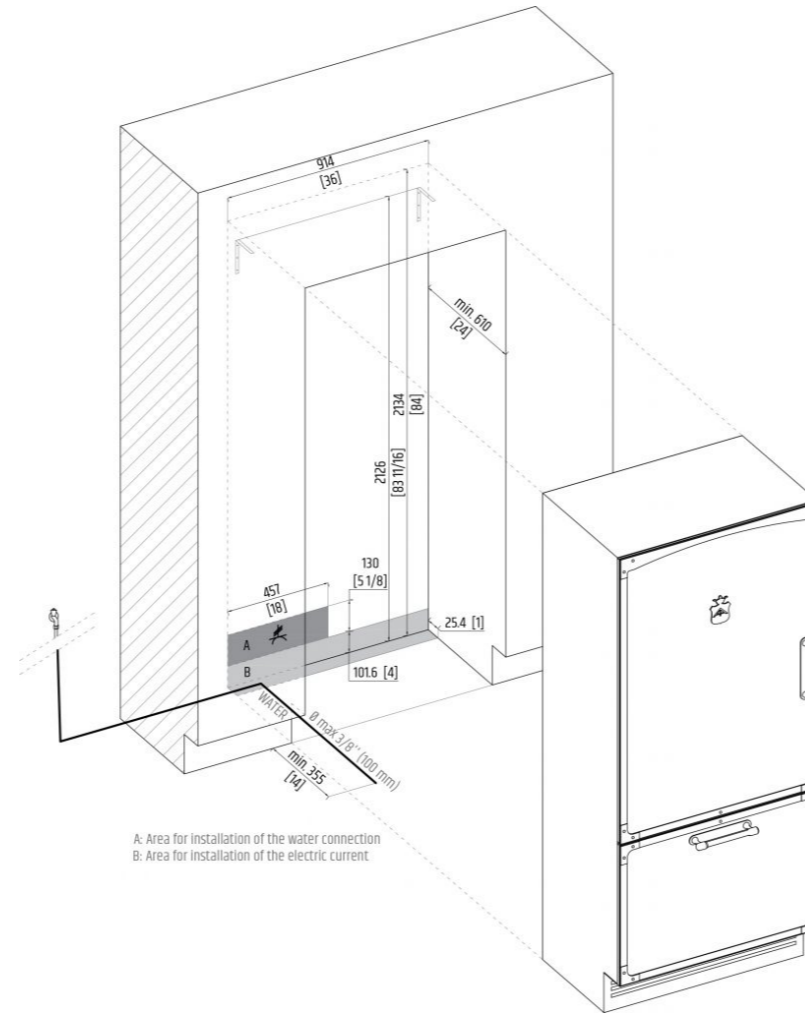


test: [https://www.officinegullo.com/wp-](https://www.officinegullo.com/wp-content/uploads/FRR027i_installation-3-814x1024.jpeg)

[content/uploads/FRR027i_installation-3-814x1024.jpeg](https://www.officinegullo.com/wp-content/uploads/FRR027i_installation-3-814x1024.jpeg)

PLANNING NOTES

Flat hinge. Door hinge right, reversible. Door opening angle of 115°, optional 90° door stop. Max. door panel weight: Door 77 lb. Drawer 22 lb. Shut-off valve for water connection must be planned next to the appliance and always be accessible. If the water pressure exceeds 116 psi, connect pressure relief valve between water tap and hose set. Cold water connection required. Electrical location 6" above ground in lower left corner of unit. Water pressure 29 to 116 psi.

TECHNICAL DRAWINGS AND CONNECTIONS

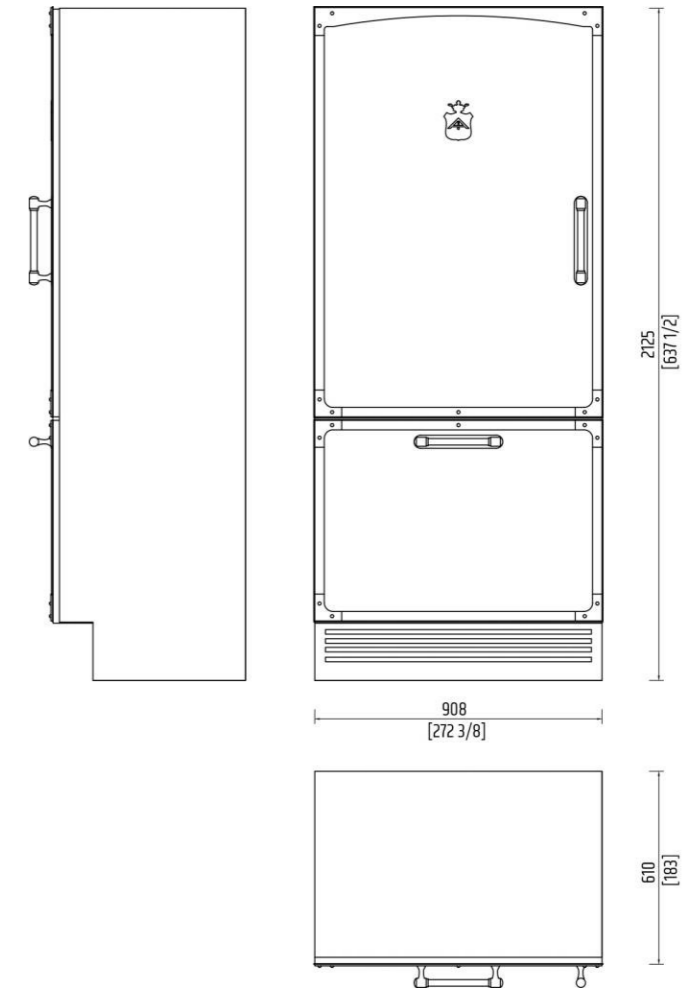

TECHNICAL INFO

WIDTH	35 3/4" in
DEPTH	24" in
HEIGHT	83 3/4"
VOLTAGE	[120 V]
FREQUENCY	Hz. 60
WATER INLET SUPPLY HOSE	Supply hose 118" with 3/4" connection
WATER PRESSURE	29 to 116 psi
PLUG TYPE	wired with plug
NOISE LEVEL	41
REFRIGERATOR NET CAPACITY	19.8 cu.ft.
FREEZER NET CAPACITY	14.3 cu. ft.
REVERSIBLE DOOR	X