

FRIDGE-FREEZER




DESCRIPTION

The built-in fridge-freezer combination offers Stainless steel interior, Generous LED lighting concept, Solid aluminum door bins, Net volume 19.6 cu.ft. (557 liters), Integrated automatic ice maker with fixed water connection in the freezer, drawer, One motorized glass shelf, adjustable when fully loaded, One asymmetrically split glass shelf, Fully extendable freezer drawer with practical divider. Electronic precision temperature control with digital temperature display. Dynamic cool air distribution with Multi- Flow Air System. Automatic defrosting with defrost water evaporation. Activated charcoal air filter. Energy-saving vacation mode. Open-door and malfunction warning system. ENERGY STAR® qualified. Gaggenau mechanism.

FEATURES

Cooling compartment: Net volume 14.3 cu. ft. No-frost technology with fast cooling. Temperature adjustable from 35 °F to 46 °F (+2 °C to +8 °C). 2 safety glass shelves, 1 of which is motorized. 1 asymmetrically split safety glass shelf, manually adjustable. 2 fully extendable drawers with transparent front. 2 door bins with transparent front flap. Bright interior lighting with LED sidewall pillars. 4 height adjustable door bins, two of which are gallon door bins. Temperature controlled drawer: Net volume 0.9 cu. ft. No-frost technology. 1 continuous, fully-extendable temperature controlled drawer (just above 32°F) with transparent front and integrated lighting, manually controllable. Freezer compartment: Net volume 5.8 cu. ft. (165 liters). No-frost technology with fast freezing. Temperature adjustable from 7 °F to -9 °F (-14 °C to -25 °C). 2 fully extendable drawers. Interior lighting with two spot lights. Ice dispenser: Integrated automatic ice maker in the freezer compartment, with fixed water connection. Ice maker can be switched off independently. Ice cube production approx. 3.1 lb (1.4 kg)/24 h. Removable ice storage bin with approx. 6.6 lb (3 kg) capacity.


INSTALLATION

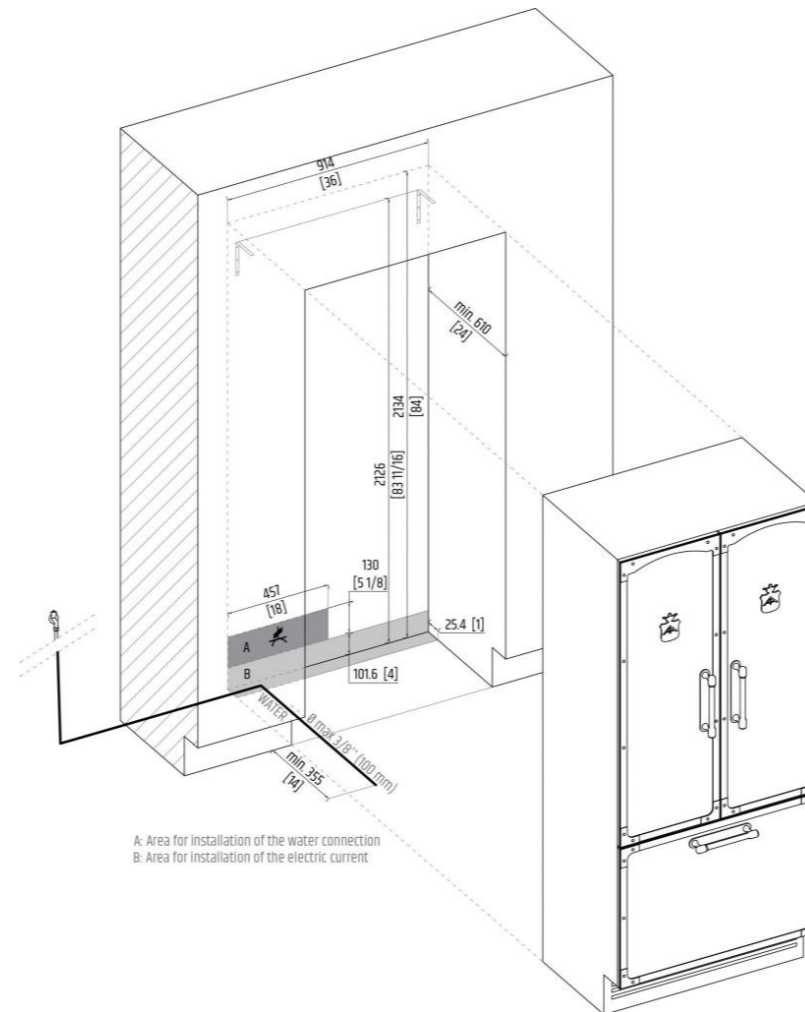

PLANNING NOTES

Flat hinge. Door opening angle of 115°, optional 90° door stop. Max. door panel weight: Each door 126 lb. Drawer 22 lb. Shut-off valve for water connection must be planned next to the appliance and always be accessible. If the water pressure exceeds 116 psi, connect pressure relief valve between water tap and hose set. Cold water connection required. Electrical location 6" above ground in lower left corner of unit. Water pressure 29 to 116 psi.

TECHNICAL DRAWINGS AND CONNECTIONS

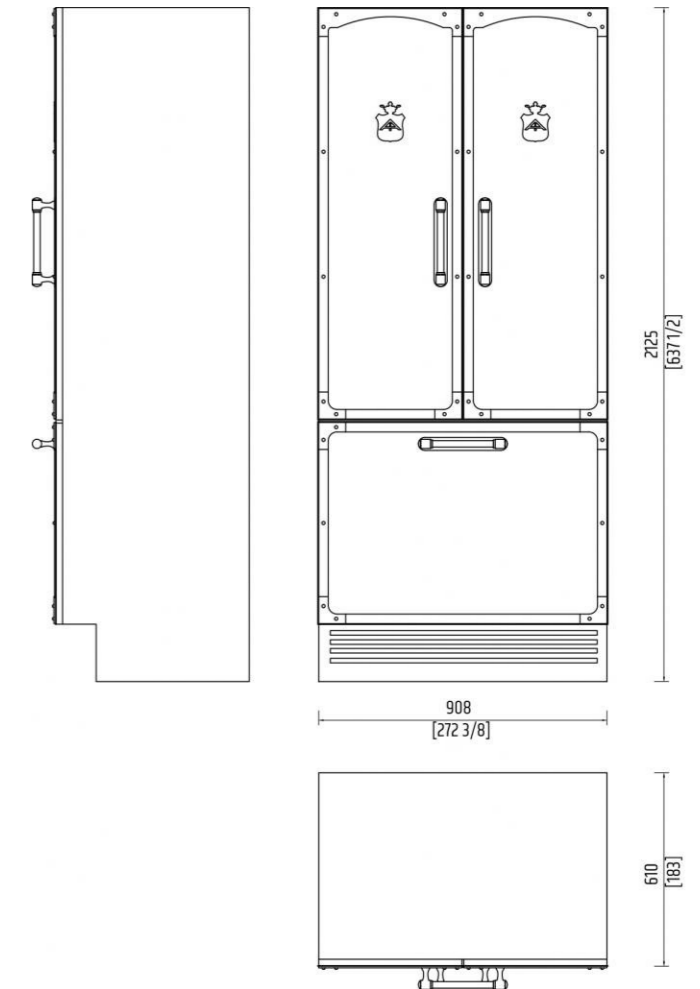

TECHNICAL INFO

WIDTH	35 3/4" in
DEPTH	24" in
HEIGHT	83 3/4"
VOLTAGE	[120 V]
FREQUENCY	Hz. 60
WATER INLET SUPPLY HOSE	Supply hose 118" with 3/4" connection
WATER PRESSURE	29 to 116 psi
PLUG TYPE	wired with plug - 120V-3 prong
NOISE LEVEL	41
REFRIGERATOR NET CAPACITY	19.6 cu.ft.(557 liters)
FREEZER NET CAPACITY	5.8 cu.ft.(165 liters)
REVERSIBLE DOOR	X